


	Activity	Act. Immed. Prec.	Exp. Time
(A)	Excavating	-	5 days
(B)	Pour foundation	A	2
(C)	Outside plumbing	A	6
(D)	Framing	B	12
(E)	Inside plumbing	D	10
(F)	Wiring	D	9
(G)	Roofing	D	5
(H)	Brickwork	B	9
(I)	Plumbing Inspection	C, E	1
(J)	Shingling	G	2
(K)	Cover walls	F, I, J	3
(L)	Interior finishing	K	9
(M)	Exterior finishing	G, H	7
(N)	Landscaping	M	8

Current CPM diagram



Older PERT diagram

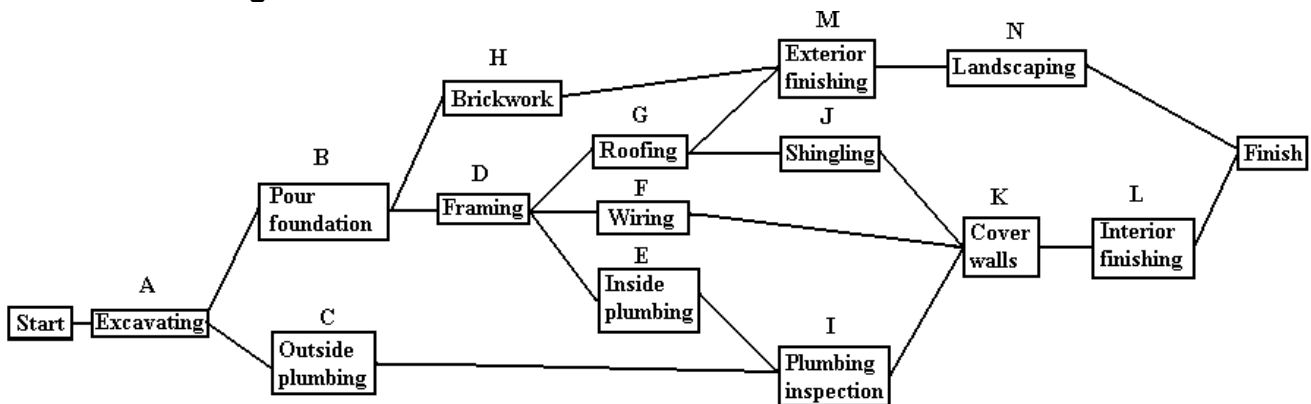